

Fencing for life

TROPHÉE
SALON DE LA PISCINE LYON 2008
DE LA NOUVEAUTÉ

Tested by CSTB for wind resistance and resistant up to 120km/h

info@silvadec.com
www.silvadec.com

Tel : 02 97 45 09 00
Fax : 02 97 45 09 89

Silvadec
Parc D'activités de L'Estuaire
56190 Arzal

Durability

Resistance to high winds. Maintenance-free coated aluminium posts. 25 year guarantee boards against insects and fungus.

No treatment required

The product requires no surface treatment.

Visually appealing

Boards have a twin finish for a made to measure look. Very nice and trendy mix of wood composite and aluminium. Available in several colours.

Practical

Can be installed on all types of grounds. Various heights available.



ADEME



Agence de l'Environnement
et de la Maîtrise de l'Energie

Silvadec is contributing to a sustainable and protected environment by using recycled products from European sawmills and by producing products that are 100% recyclable.

CONCOURS DE L'INNOVATION
INNOVATION AWARDS



Médaille d'Or
de l'innovation
Batimat 2003




Gates, fences, screens, palisades, wind barriers ... enclose, protect, adorn your terraces, walls and garden borders.

Manufactured to resist against external climate conditions, SILVADEC fencing offers the mechanical resistance and durability of aluminium with the durability and easy maintenance of Forexia®. This combination of materials produces fencing that is hard-wearing, easy to maintain and visually appealing.

Fencing from SILVADEC includes :

Posts

Aluminium posts size 70x70mm. QUALICOAT surface finish.
Heights available : 49cm, 94cm, and 124cm for use with post support;
141,5cm, 171,5cm, 201,5cm, and 231,5cm for fixing in cement.
Available in two colours : metallic grey and anthracite grey.

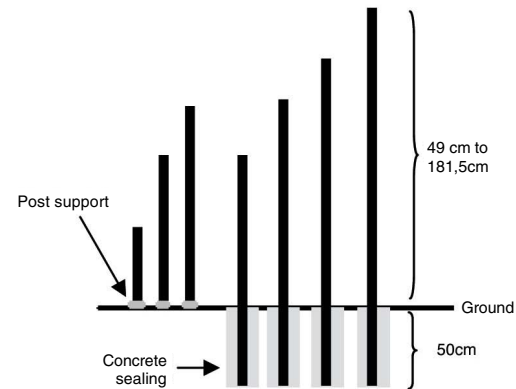

Boards

Boards in Forexia® are 150x21mm, in lengths of 1,5m.
Choice of grooved or flat surface for a greater range of designs.
Choice of colours : exotic brown, colorado brown, iroise grey, tropical red.



Caps

Aluminium caps. Choice of colour : metallic grey and anthracite grey.



Fixing post supports

For fixing posts in concrete slabs.

For fixing in ground, the posts must be placed at a depth of 50cm and fixed in concrete.

Finishing profile

These provide an attractive finish for the first and last posts.



Installation instructions

Installation instructions can be obtained from your distributor or downloaded from www.silvadec.com

These instructions must be adhered to in order to ensure the product guarantee.

Distributor